

## Technical SUPPORT

### Firmware upgrade of the LFX Master DMX to version > 2

Need help? Send an [eMail](#)

#### General discription


The uprade file located on a micro SD card overwrites the firmware of the LFX Master DMX.  
The upgrade introduces a lot of new features: gel library by gel name, direct entry of Kelvin, G/M, HUE, saturation, ...  
We strongly recommend to install the latest software to the unit.

#### Check the current software version of the LFX Master DMX

1. Power up the LFX Master DMX
2. Turn rotary switch "EFFECT" to position "DMX set-up"
3. Use JOG tro navigate to > basics > software version: if version is not "2.01" please install the up-grade. Latest firmware version is 2.01.

#### Updade process

1. Copy the new software, received by e-mail, to the root level of the SD-card (or SDHC)  
It needs to by formatted as FAT 32 (most likely that's the default format for new SD-cards)
2. remove all DC power plugs (!)
3. Please remove the right hand side cover by screwing off the two screws (Torx 10).  
The SD-card slot is located on the right hand corner.
4. insert the SD-card into the slot, **contacts** of the card should **face down**

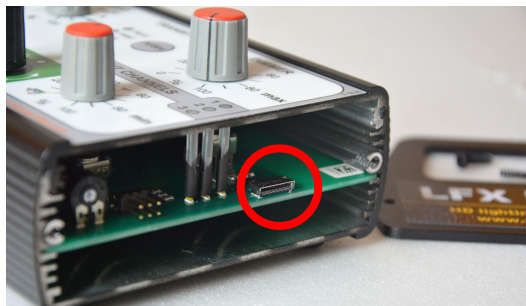

5. power up the LFX Master DMX

6. On the screen you will see:

```
Actual version 1.XX  
File version 2.01  
Press JOG to install
```

Press JOG  
to install

7. power off, remove the SD-card

8. Re-assemble the side panel. That's it!

**Time required for installation**  
about 1 minute

#### required equipment

- micro SD-card (max. 32 GB)
- Screwdriver TX10



**WARNING**  
DO NOT INTERRUPT  
THE POWER SUPPLY  
UNTIL THE UPDATE  
PROCESS IS FINIS-  
HED!

**miE**  
movie-intercom®  
LightingFX Tools

phone +49 (0)30-2232 0575  
fax +49 (0)30-2232 0571  
web www.movie-inter.com  
mail info@movie-inter.com