

Quick Start Guide

lighting effect generator LFXHub

LightingFX Tools

phone +49 (0)30-2232 0575
fax +49 (0)30-2232 0571
web www.movie-inter.com
mail info@movie-inter.com

1 select a **category** with rotary switch "EFFECT"



Follow the line drawn on the control panel leading from the knob "EFFECT" to a white box. Only these knobs and buttons are relevant.

Find a **list** of lighting effects producible with the LFXHub on the reverse page.


2 select a **preset** with the JOG



push JOG



back



turn JOG >
select preset
> push JOG

3 set the upper brightness level with **DIMMER max.**



This document / complete user manual of all LFX Tools are available for free on

www.movie-inter.com
support > downloads

optional settings

- "DIMMER min": brightness level does not fall below this value
- "CH options": menu for individual output channel settings (sync, delay or inverted)
- "measure": freezes a lighting effect, relaxed set-up for "DIMMER max" and "DIMMER min"
- "ramp": adapts flicker curve to filament size, makes edges of the flicker curve hard or soft

Quick Start Guide

lighting effect generator LFXHub



LightingFX Tools

category preset name application

	<ul style="list-style-type: none"> feature news videoclip 	<p>TV set</p> <p>movie projector</p>
	<ul style="list-style-type: none"> fire 	<p>fire place</p> <p>fire storm 3D</p>
	<ul style="list-style-type: none"> candle 	<p>candle lighter</p>
	<ul style="list-style-type: none"> welding 	<p>welding</p> <p>"broken" fluorescent</p> <p>short-circuit</p>
	<p>no Presets available</p>	<p>stand alone dimmer</p> <p>cross fader (CH2=INV)</p>
	<ul style="list-style-type: none"> sawtooth sym. flasher neon light 1 	<p>different neon sign FX,</p> <p>play with speed, sym</p> <p>and channel settings</p>
	<ul style="list-style-type: none"> const. flasher turn indicator neon light 2 	<p>construction flasher with</p> <p>3 channels</p> <p>also use as strobe light,</p> <p>projector flicker:</p> <p>increase speed to 100%</p> <p>different neon sign FX</p>

generator module

phone +49 (0)30-2232 0575
 fax +49 (0)30-2232 0571
 web www.movie-inter.com
 mail info@movie-inter.com

Please find the **set-up procedure** on the reverse page.



plugged-in accessory is automatically identified by the analog input

cable remote dimmer replaces internal "DIMMER max", no settings required

<p>LightingSensor (optical detection) /</p> <p>PowerSensor (electrical detection)</p>	<p>actor-activated lighting</p> <p>a sensor can (de-)activate any effect made with the generator module</p>	<p>LFX Sensor switches LFXHub with function: Dimmer</p> <p>>change function</p>	control input
---	--	--	---------------

LightingFX trigger when plugged in three additional presets are available (Lightning software upgrade must be installed)


<ul style="list-style-type: none"> lightningX single flash multi flash 	<p>lightning of a thunderstorm</p> <p>...of a photo camera</p> <p>flashes from different directions, explosions</p>	<p>DIM min=100% min=off</p> <p>speed= 70%</p> <p>>preset: lightningX</p> <p>>measure/CH delay</p>	control input
---	---	---	---------------



<p>CH1= 001 to 004</p> <p>CH2= 005 to 008</p> <p>CH3= 009 to 012</p> <p>>change DMX-TX-ID</p>	<p>1. connect DMX-TX module at socket "DMX IN/OUT"</p> <p>2. set-up of DMX addresses within the menu</p> <p>All connected lamps will be off in this mode!</p>
--	--

connect @ analog outputs:

- KinoFlo control cable
- analog dimmer packs or ECGs (0...10VDC)

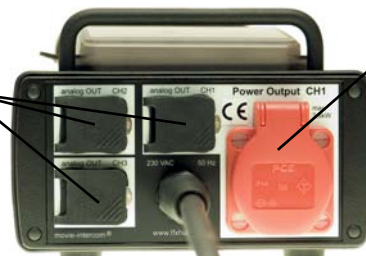

power output



HOTLINE: +49 (0) 30- 2232 0575